


UpRight X Series

Self-Propelled Lifts



- ◆ Rigid scissor set provides solid, stable platform
- ◆ Highly maneuverable - very tight turning radius
- ◆ Low stowed height and lifting rear guardrail for easy material loading
- ◆ Swing-out component modules
- ◆ One-hand joystick control for simple, convenient operation
- ◆ Hydraulically operated pothole protection
- ◆ Cushioned joystick controller for smooth precise positioning
- ◆ Non-marking tires protect floors
- ◆ Dual front wheel hydraulic motors
- ◆ Controller switches easily from right to left side
- ◆ Steel deck with slip-resistant surface
- ◆ Five year structural warranty

X20N • X20W • X26N • X31N

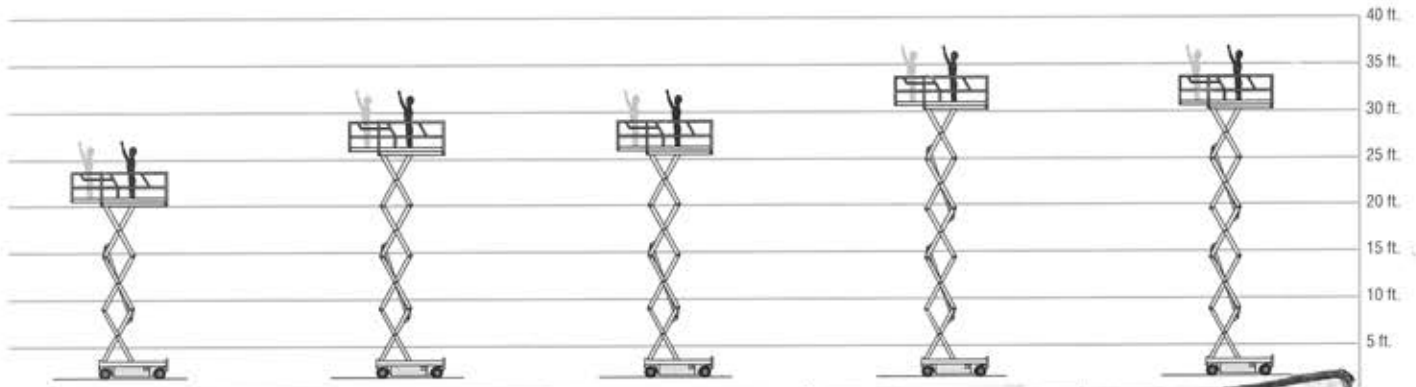

X20W	X26N	X26N	X31N	X31N
8.10m**	32 ft.**	9.92m**	37 ft.**	11.32m**
6.10m	26 ft.	7.92m	30 ft. 7 in.	9.32m
.96m	48 in.	1.21m	48 in.	1.21m
6.08m	26 ft.	7.92m	30 ft. 7 in.	9.32m
454kg	1,000 lbs.	454 kg	700 lbs.	317 kg
1.12m x 2.21m	46.25 in. x 87 in.	1.17m x 2.21m	46.25 in. x 87 in.	1.17m x 2.21m
1.21m	48 in.	1.22m	48 in.	1.22m
2.34m	92.5 in.	2.34m	92.5 in.	2.34m
3.26m	128.25 in.	3.26m	128.25 in.	3.26m
1.99m	78 in.	1.98m	89 in.	2.26m
n/a	n/a	n/a	74 in.	1.88m
1,938 kg	4,747 lbs.	2,153 kg	5,430 lbs.	2,531 kg
203mm	8 in.	203mm	8 in.	203mm
2.74m	108 in.	2.74m	108 in.	2.74m
One hand joystick	One hand joystick	One hand joystick	One hand joystick	One hand joystick
13 degrees	22%	12 degrees	20%	11 degrees
28 seconds	40 seconds	40 seconds	66 seconds/39 seconds	66 seconds/39 seconds
standard	standard	standard	standard	standard
3.9 km/h	2.3mph	3.7km/h	2.3mph	3.7km/h
1.2km/h	0.7mph	1.2km/h	0.7mph	1.2km/h
standard	standard	standard	standard	standard
standard	standard	standard	standard	standard
381 mm dia.	15 in. dia.	381 mm dia.	15 in. dia.	381 mm dia.
152 mm.	6 in.	152 mm.	6 in.	152 mm.
standard	standard	standard	standard	standard
n/a	n/a	n/a	n/a	n/a
optional	optional	optional	optional	optional
standard	standard	standard	standard	standard
standard	standard	standard	standard	standard
standard	standard	standard	standard	standard
standard	standard	standard	standard	standard
standard	standard	standard	standard	standard
optional	optional	optional	optional	optional
optional	optional	optional	optional	optional
optional	optional	optional	optional	optional
optional	optional	optional	optional	optional
optional	optional	optional	optional	optional
standard	standard	standard	standard	standard
standard	standard	standard	standard	standard
optional	optional	optional	optional	optional
optional	optional	optional	optional	optional
optional	optional	optional	optional	optional